

The FlexSecure FS 15 is a 1.5 mm (1/16") a aluminum bodied cable seal. FS 15 is regulated bulk food and chemical shipments over the APPLICATIONS


• High Value Shipments
• Trailer Door Latches
• Container Door Latches The FlexSecure FS 15 is a 1.5 mm (1/16") anodized aluminum bodied cable seal. FS 15 is regularly used in bulk food and chemical shipments over the road.

- Container Door Latches
- Bulk Tankers
- Valves and Meters

# TydenBrooks

### **FEATURES**

- Tamper-evident cable separates into individual strands when cut and cannot be resealed.
- Provides added durability over plastic bodied seals but maintains the color identification.
- Provides a versatile method of identification.
- Available in a variety of colors.
- Can be customized by laser printing a name, logo, consecutive numbers and barcode.
- Patent Pending.



### **MATERIAL**

- Main body: Aluminum alloy.
- Internal Locking Components: Zinc and Steel
- Cable: galvanized non-preformed aircraft control cable.

### STRENGTH CHARACTERISTICS


727 lbs.



Body: 1.12" x 0.90" x 0.24" (28.6mm x 22.9mm x 6.1mm)

Cable Diameter: 1.5 mm (1/16")

Cable Length: Standard - 12" (Custom lengths available)

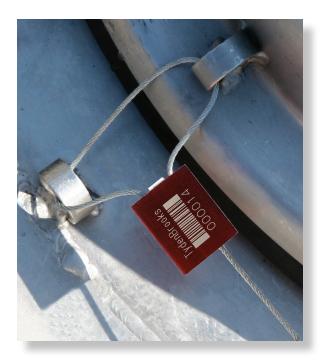

Seals shown not actual size.





# FlexSecure FS 15



# **MARKING/PRINTING**

Laser Printing: Name, logo, consecutive numbers, barcode.

# **STANDARD COLORS**



Other colors available upon request.

# **PACKAGING**

Standard: 10 per tray

200 seals per carton

Box dimensions: 16.5"x 9.5"x 7.25" (41.9cm x 24.1cm x 18.4cm)

Weight: 9 lbs.

